


EPI ELECTRIC







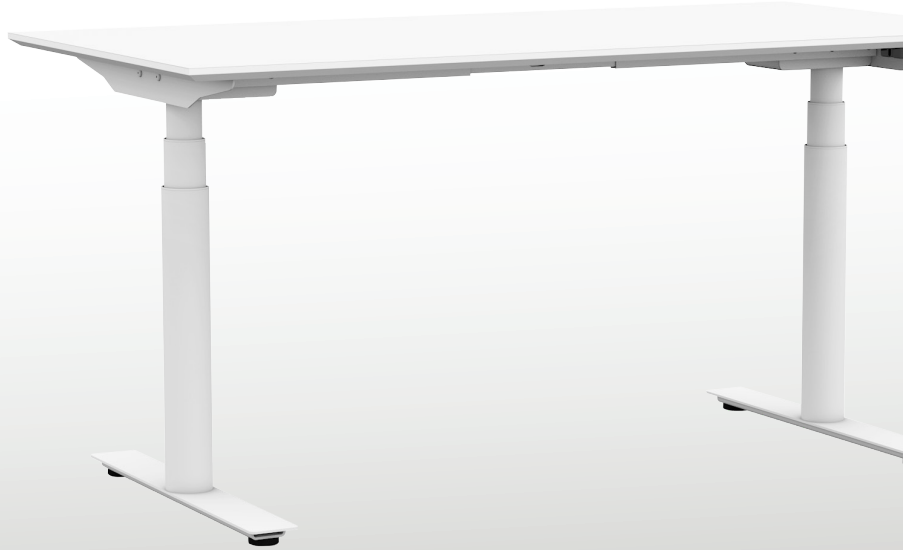








Sit to stand

2-columns solution circular 3-stage

Our most advanced height-adjustable stand, which provides optimal flexibility and individual adjustment for activity-based work. The stroke allows personalised maximum settings in standing and sitting position.



Technical Specification

- | | | | |
|---|---|--|---|
|  Table top
Width: 800-2000 mm
Depth: 500-1000 mm |  Stroke
500 mm, 650 mm |  Large tube
Available both up and down
  |  Load
See specifications of your selected electronics |
|  Velocity
See specifications of your selected electronics |  Height
500: 617-1117 mm*
500: 622-1122 mm**
650: 586-1236 mm
excl. feet and table top |  Tube dimensions
Ø 80, 70, 60 mm |  Noise level
See specifications of your selected electronics |
|  Available electronics
iDrive
ECS+
ECS2 |  Standard in
  
White Silver Black | | |

* Large tube up ** Large tube down



Adjustable width with telescopic crossbar



3-stage solution with our unique glide system that never scratches paint



Also available with large column up